

COOLMUSIC
CHANGE LIFE WITH MUSIC



深圳市酷乐科技有限公司

公司官方网站：www.coolmusic-tech.com

品牌：COOLMUSIC 服务热线：0755 - 89344156

地址：深圳市龙岗区园山街道龙腾街28号A栋5楼 邮编：518115


COOLMUSIC
CHANGE LIFE WITH MUSIC

DM50

50W多功能监听音箱

用户使用说明书

User manual

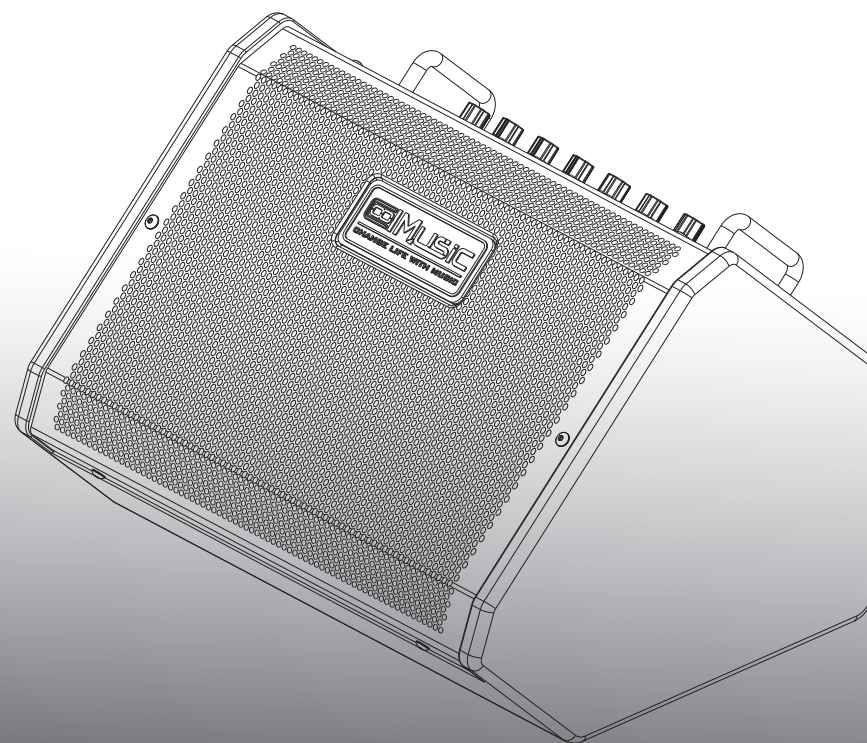

酷乐科技(深圳)有限公司
COOLMUSIC(SHENZHEN) TECH CO.,LTD



Warning! Safety Precautions Please note before using

1. Before using the power, please confirm whether the voltage in the place of use matches the working voltage of the amplifier;
2. Do not disassemble the boot case, otherwise the amplifier may be damaged;
3. Do not repair the machine yourself! Opening the case may expose your body to dangerous voltages. If you need repairs, please find qualified repairs; or repairs by our company's maintenance personnel;
4. If you are a maintenance staff, please note that the equipment needs to be repaired in any case of damage, including: broken and broken power cord, damaged socket head, liquid flowing into the interior of the machine, etc. ;
5. Make sure the electrical outlet in your home is grounded;
6. Do not place objects filled with liquids on the equipment;
7. The place of use of this product should be far away from the sidewalk, and the power cord should be unplugged from the power outlet in time after use;
8. Do not store or use the amplifier in a humid environment;

Other matter

1. Protect the power cord plug from being trampled or stressed;
2. After using the device, please unplug the power cord from the socket;
3. It is normal to have a little heat when using this product;
4. To avoid disturbing your neighbors, please adjust the volume to an appropriate level;
5. When you want to transport the device, please put the device in the packaging box that came with the machine, and then transport it.

音箱参数

额定功率： 50W RMS

输入灵敏度： INPUT1 MIC/LINE -62db/-46db;
INPUT2 -42db ;

输出电平： LINE OUT +4db;

耳机输出： 80mV@16OHM;

EQ调节范围： 高音@10KHZ 中音@2.5KHZ
低音@100HZ +/-12db ;

蓝牙音频： 蓝牙5.2版本 接收距离 10米

扬声器： 低音喇叭 8寸 4OHM 高音喇叭 3寸 8OHM;


接口： INPUT1 XLR/1/4英寸组合 插座
INPUT2 1/4英寸耳机插座；
耳机 3.5mm插座；
LINEOUT 1/4英寸耳机插座；

电源： 电源适配器 输入100-240VAC，输出DC24V3A

尺寸： 343 (宽) *296 (深) *265 (高)

重量： 6.3KG

功能说明

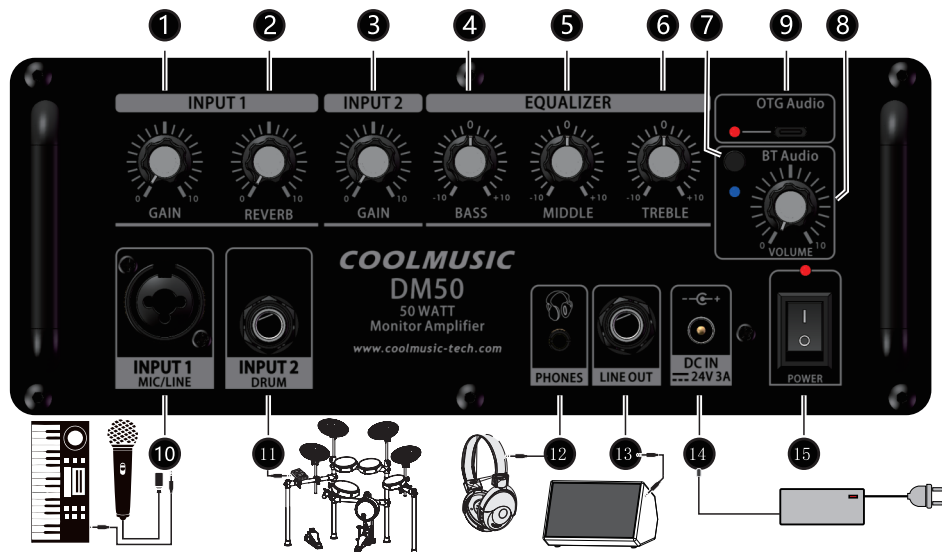

INPUT 1

- ① **GAIN:**
调节增益大小；
- ② **REVERB:**
调节混响大小；

INPUT 2

- ③ **GAIN:**
调节增益大小；

EQUALIZER

- ④ **BASS:**
调节低频信号；
- ⑤ **MIDDLE:**
调节中频信号；
- ⑥ **TREBLE:**
调节高频信号；

⑦ ⑧ BT AUDIO

长按打开蓝牙，蓝色指示灯闪烁并有提示音；调节蓝牙播放音量大小；

⑨ OTG AUDIO:

使用OTG数据线连接手机电脑等设备后可进行录音，播放等，亮红色指示灯；

⑩ INPUT 1:

卡侬/6.35组合插座输入，卡侬输入为麦克风输入，具有较高的增益；6.35输入为LINE输入，增益较低，可连接键盘，吉它等乐器；

⑪ INPUT 2:

乐器输入，可连接电子鼓，原声吉它/电子琴等乐器；

⑫ PHONES:

此处连接耳机

⑬ LINE OUT:

将此插孔连接至调音台或其它设备


⑭ DC IN:

电源输入，请使用专用的24V 3A电源适配器；

⑮ POWER:

打开/关闭电源。

Function

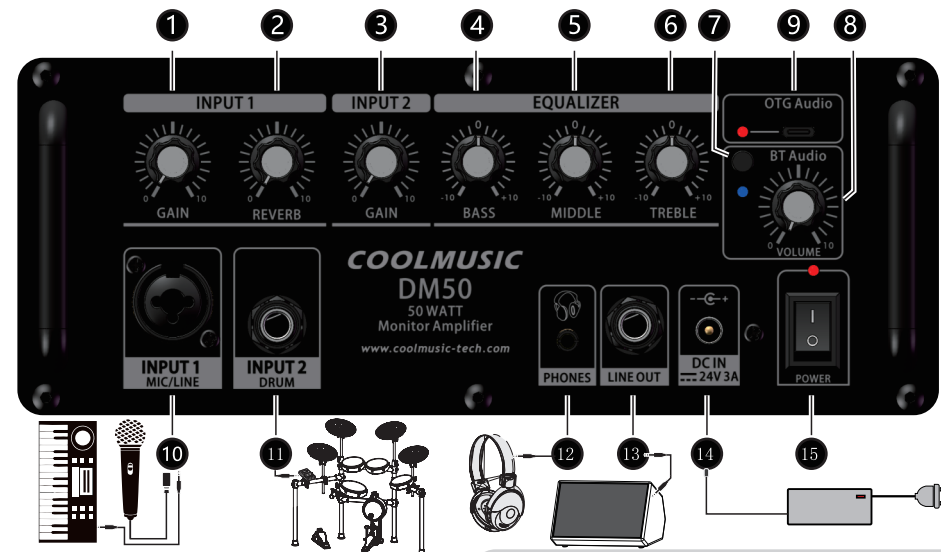

INPUT 1

- ① **GAIN:**
Adjust the gain level.
- ② **REVERB:**
Adjust the level of reverb.

INPUT 2

- ③ **GAIN:**
Adjust the gain level.

EQUALIZER

- ④ **BASS:**
Adjust low frequencies.
- ⑤ **MIDDLE:**
Adjust middle frequencies.
- ⑥ **TREBLE:**
Adjust treble frequencies.

⑦ ⑧ BT AUDIO

Turn on Bluetooth; the indicator light will blink. Adjust the volume level.

⑨ OTG AUDIO:

Once the phone and computer are connected, recordings can be made, played back, and a red light will illuminate.

⑩ INPUT 1:

The Canon/6.35 combo socket input allows for both Canon inputs, which are microphone inputs with high gain, and 6.35 inputs, which are LINE inputs with lower gain. The 6.35 inputs can be used to connect instruments like keyboards and guitars.

⑪ INPUT 2:

Connect electronic drums, acoustic guitars/keyboards, and other musical instruments.

⑫ PHONES:

Connect headphones here.

⑬ LINE OUT:

Connect this port to other devices.

⑭ DC IN:

Please use the dedicated 24V 3A power adapter.

⑮ POWER:

Turn power on/off.

Parameter

Output Power : 50W RMS

Sensitivity : INPUT1 MIC/LINE -62db/-46db;
INPUT2 -42db ;

Output Resistance : LINE OUT +4db;

Headset Output. : 80mV@16OHM;

EQVALIZER : HIGH @10KHZ @2.5KHZ
LOW @100HZ +/-12db ;

Bluetooth : Bluetooth version 5.2.
Receive range: 10 meters.

Speaker : WOOFER 8寸 4OHM TWEETER 3寸 8OHM;

Interface : INPUT1 XLR/1/4-inch combination socket.
INPUT2 1/4-inch combination socket.
Headset 3.5mm socket ;
LINEOUT 1/4-inch combination socket.

Adapter : Input voltage:100-240VAC
out voltage:DC24V3A

Size : 343 (wide) *296 (deep) *265 (high)

Weight : 6.3KG



警告! 重要的安全事项 通电使用之前请通读以下事项

1. 在对音箱进行通电使用之前, 请您先确认一下使用场所的额定电压是否与音箱的工作电压相符, 以免对您的人身安全造成不必要的伤害或者对机器造成不可修复的损伤;
2. 不要试图对音箱做拆机处理, 以免导致音箱内部电路的损坏;
3. 当音箱损坏时请不要自行维修机器! 打开机箱可能使您的身体暴露于危险电压或其他危险情况之下。如需维修或者维护请找有资质的维修人员进行服务; 或者将机器发回本公司, 由本公司的维修人员进行维修;
4. 如果您是具有维修资质的服务人员请注意:
设备在任何被损坏的情况下都需要进行维修服务, 其中包括: 电源线线缆破损断裂、插座头损坏、液体流入或者固体落入机器设备内部以及设备被放置在潮湿或雨水环境当中等造成机器不能正常工作的情况;
5. 确保音箱的电源线所接的电源插座已进行了妥善的接地处理。
6. 设备上不应放置诸如花瓶类的装满液体的物品;
7. 当需要插入电源线到插座时, 应确保远离人行通道, 并在使用完毕以后及时将电源线从电源插座上拔下;
8. 不要将音箱置于潮湿的环境中存放或使用;

其他注意事项

1. 保护电源线不要受到践踏或者重压, 特别是插头, 以方便以后插拔。
2. 当设备长时间不使用的情况下请将电源线从电源插座上拔下;
3. 大音量的使用本产品时, 若有少许热量产生实属正常现象;
4. 为避免干扰您的邻居, 请将音量调节到适当的大小;
5. 当您想要运输该设备时, 请尽量将设备装入本机附带的包装外箱内, 而后再对音箱做运输处理。